Energy Recovery from Wastewater Sludge via Anaerobic Digestion and Steam Rankine Cogeneration

ME 401 Thermodynamics III – Project 2
Boise State University

Caleb H.

April 2026

Abstract

This report presents a coupled simulation of an anaerobic digester and a steam Rankine cogeneration plant for energy recovery from municipal wastewater sludge. The anaerobic digester is modeled as a continuous stirred-tank reactor operating at mesophilic conditions (35 °C), producing methane at a baseline rate of $0.4\,\mathrm{m^3\,m^{-3}\,d^{-1}}$. The biogas fuels a regenerative Rankine cycle with steam extraction for process heating, with all thermodynamic states computed via CoolProp. At baseline conditions (reactor volume $3000\,\mathrm{m^3}$, serving a population of 100,000), the system produces 104 kW of net electrical output and 166 kW of process heat, achieving a combined heat and power efficiency of 54.2% and offsetting 41.6% of the plant's grid electricity demand. Parametric optimization reveals that a reactor volume of approximately $7157\,\mathrm{m^3}$ is required for full electrical self-sufficiency. Economic analysis indicates a simple payback period of 2.9 years and annual avoidance of 365 tonnes of CO_2 emissions.

1 Introduction

Wastewater treatment is an energy-intensive process. Municipal treatment plants in the United States consume approximately 0.3 to $0.6\,\mathrm{kW\,h\,m^{-3}}$ of wastewater treated, representing a significant operational cost and carbon footprint [1]. At the same time, the organic content of wastewater sludge represents a substantial, largely untapped energy resource. Anaerobic digestion (AD) converts this organic matter into biogas—a mixture of methane

and carbon dioxide—through a series of biochemical reactions carried out by microbial communities in the absence of oxygen.

The biogas produced by AD can fuel combined heat and power (CHP) systems to simultaneously generate electricity and useful thermal energy, a configuration known as cogeneration. When the CHP system is integrated with the digester, the extracted process heat can maintain the reactor at its optimal operating temperature, creating a thermally self-sustaining loop. The electrical output can offset a portion—or potentially all—of the treatment plant's grid electricity consumption.

This project models and evaluates such an integrated system. The objectives are threefold:

1. Develop a coupled steady-state simulation of an anaerobic digester and a steam Rankine cogeneration plant.
2. Perform parametric analysis and numerical optimization to characterize system performance across a range of operating conditions.
3. Compare the CHP-integrated system to conventional grid-powered operation in terms of energy, cost, and emissions.

The simulation is implemented in Python, using CoolProp for thermodynamic property evaluation and SciPy for numerical optimization. All source code, unit tests, and generated data accompany this report.

2 Methodology

2.1 System Overview

The modeled system consists of two coupled subsystems (Figure 1):

1. **Anaerobic Digester**: A continuous stirred-tank reactor (CSTR) that receives wastewater sludge and produces biogas through mesophilic anaerobic digestion.
2. **Cogeneration Plant**: A steam Rankine cycle with extraction that converts biogas thermal energy into electricity and process heat.

The two subsystems are coupled: biogas from the digester provides fuel for the CHP boiler, and extracted steam from the turbine provides process heat to maintain digester temperature. The extraction fraction is determined iteratively to match the digester's thermal demand.

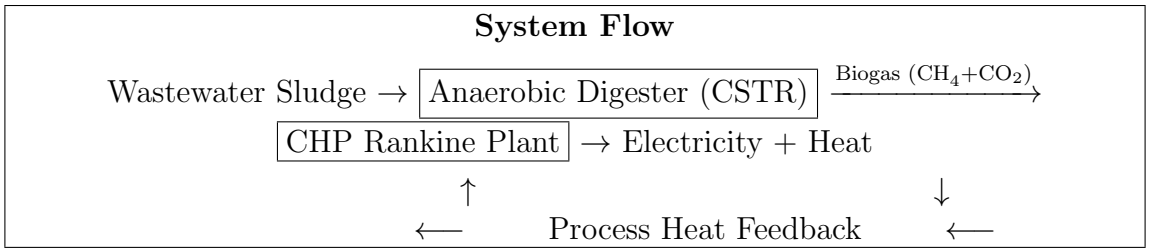

Figure 1: Schematic of the coupled anaerobic digester and cogeneration system. Biogas flows from the digester to the CHP plant; process heat returns to maintain digester temperature.

2.2 Anaerobic Digester Model

The digester is modeled as a steady-state CSTR operating under mesophilic conditions. The key governing equations are drawn from the literature [1].

Hydraulic Retention Time (HRT). The HRT characterizes the average residence time of sludge in the reactor:

$$\mathrm{HRT} = \frac{V}{Q} \tag{1}$$

where V is the reactor volume (m^3) and Q is the volumetric feed rate ($\mathrm{m}^3\,\mathrm{d}^{-1}$). For mesophilic digesters, typical HRT values range from 10 to 40 days [1]. A baseline value of 20 days is used throughout this analysis.

Organic Loading Rate (OLR). The OLR quantifies the mass of volatile solids fed per unit reactor volume per day:

$$\mathrm{OLR} = \frac{Q \cdot \mathrm{VS_{in}}}{V} \tag{2}$$

where $\mathrm{VS_{in}}$ is the influent volatile solids concentration ($\mathrm{kg\,m^{-3}}$).

Methane Production. The volumetric methane production rate (VMP) is taken as $0.4\,\mathrm{m}^3$ CH_4 per m^3 of reactor volume per day, consistent with values reported for optimized sewage sludge digestion. The total methane production is:

$$\dot{V}_{\mathrm{CH_4}} = \mathrm{VMP} \times V \tag{3}$$

Biogas composition is assumed to be 60% CH_4 and 40% CO_2 by volume, within the 55–70% methane range reported in the literature [1]. The thermal energy content of the biogas is:

$$\dot{Q}_{\mathrm{biogas}} = \dot{V}_{\mathrm{CH_4}} \times \mathrm{LHV_{CH_4}} \tag{4}$$

where $\mathrm{LHV}_{\mathrm{CH_4}} = 35.8\,\mathrm{MJ\,m^{-3}}$ at standard conditions.

Digester Heat Demand. The digester requires thermal input for two purposes:

1. *Sludge heating*: Raising incoming sludge from ambient to operating temperature:

$$\dot{Q}_{\mathrm{sludge}} = \dot{m} \cdot c_p \cdot (T_{\mathrm{op}} - T_{\mathrm{feed}}) \tag{5}$$

   where $\dot{m}$ is the sludge mass flow rate, $c_p \approx 4.18\,\mathrm{kJ\,kg^{-1}\,K^{-1}}$, $T_{\mathrm{op}} = 35\,^\circ\mathrm{C}$, and $T_{\mathrm{feed}} = 15\,^\circ\mathrm{C}$.

2. *Wall heat losses*: Conduction through the insulated reactor shell:

$$\dot{Q}_{\mathrm{loss}} = U \cdot A \cdot (T_{\mathrm{op}} - T_{\mathrm{amb}}) \tag{6}$$

   where $U = 1.0\,\mathrm{W\,m^{-2}\,K^{-1}}$ for an insulated concrete digester, and A is the outer surface area of the cylindrical vessel.

2.3 Cogeneration Plant Model

The CHP system is modeled as a regenerative Rankine cycle with steam extraction for process heating. The working fluid is water; all thermodynamic properties are evaluated using CoolProp [2].

Cycle Configuration. The cycle comprises eight state points and six components:

- **State 1**: Condenser exit (saturated liquid, $P_{\mathrm{cond}} = 10\,\mathrm{kPa}$)
- **State 2**: Pump I exit (compressed liquid, $P_{\mathrm{extract}} = 500\,\mathrm{kPa}$)
- **State 3**: Process heater exit (saturated liquid, P_{extract})
- **State 4**: Mixing chamber exit (liquid, P_{extract})
- **State 5**: Pump II exit (compressed liquid, $P_{\mathrm{boiler}} = 6\,\mathrm{MPa}$)
- **State 6**: Boiler exit (superheated steam, P_{boiler}, $T = 450\,^\circ\mathrm{C}$)
- **State 7**: Turbine extraction (steam, P_{extract})
- **State 8**: Turbine exhaust (wet steam, P_{cond})

Energy Balance Equations. For a total steam mass flow rate $\dot{m}$ and extraction fraction y (fraction of steam diverted to the process heater), the component energy balances per unit mass of total steam flow are:

Turbine (with isentropic efficiency $\eta_t = 0.85$):

$$w_t = (h_6 - h_7) + (1 - y)(h_7 - h_8) \tag{7}$$

Pumps (with isentropic efficiency $\eta_p = 0.80$):

$$w_{p1} = (1 - y)(h_2 - h_1), \quad w_{p2} = h_5 - h_4 \tag{8}$$

Boiler (with thermal efficiency $\eta_b = 0.85$):

$$q_{\text{in}} = h_6 - h_5, \quad \dot{m} = \frac{\dot{Q}_{\text{biogas}} \cdot \eta_b}{q_{\text{in}}} \tag{9}$$

Process heater:

$$q_{\text{process}} = y(h_7 - h_3) \tag{10}$$

Mixing chamber (adiabatic):

$$h_4 = (1 - y) \cdot h_2 + y \cdot h_3 \tag{11}$$

The extraction fraction y is determined iteratively by requiring the process heat delivered to equal the digester thermal demand:

$$y = \frac{\dot{Q}_{\text{digester}}}{\dot{m} \cdot (h_7 - h_3)} \tag{12}$$

Since $\dot{m}$ depends on h_5, which depends on h_4, which depends on y, the system is solved iteratively until convergence.

Performance Metrics.

$$\eta_{\text{elec}} = \frac{\dot{W}_{\text{net,elec}}}{\dot{Q}_{\text{fuel}}} \tag{13}$$

$$\eta_{\text{thermal}} = \frac{\dot{Q}_{\text{process}}}{\dot{Q}_{\text{fuel}}} \tag{14}$$

$$\eta_{\text{CHP}} = \frac{\dot{W}_{\text{net,elec}} + \dot{Q}_{\text{process}}}{\dot{Q}_{\text{fuel}}} \tag{15}$$

2.4 Numerical Optimization

Three optimization problems are solved using SciPy:

1. **Self-sufficiency**: Minimize reactor volume subject to $\dot{W}_{\text{net}} \geq \dot{W}_{\text{WWTP}}$, using bounded scalar optimization.
2. **Maximum power**: Optimize boiler pressure, superheat temperature, and extraction pressure to maximize $\dot{W}_{\text{net}}$ at fixed reactor volume, using differential evolution.
3. **Maximum CHP efficiency**: Same decision variables, maximizing η_{CHP}.

2.5 Grid Comparison Assumptions

The CHP system is compared against a conventional grid-powered plant using the following assumptions:

- Grid electricity cost: \$0.10/kWh
- Grid carbon intensity: 0.40 kg CO_2/kWh
- WWTP specific energy: 0.40 kW h m^{-3} wastewater
- CHP capital cost: \$2500/kW installed

2.6 Tools and Software

The simulation is implemented in Python 3.12 using the following libraries:

- **CoolProp 7.2**: Thermodynamic property evaluation for water/steam states
- **NumPy/SciPy**: Numerical computation, optimization (bounded scalar, differential evolution)
- **Matplotlib**: Figure generation

All code was developed with the assistance of Claude (Anthropic), an AI coding assistant. The codebase includes 59 unit tests validating the digester model, CHP thermodynamic calculations, energy balance closure, and coupled system integration.

3 Results

3.1 Baseline Performance

Table 1 summarizes the baseline simulation results for a 3000 m^3 reactor serving a population of 100,000.

Table 1: Baseline simulation results (V = 3000 m^3, population = 100,000).

Parameter	**Value**	**Unit**
Digester		
Hydraulic retention time	20.0	days
Organic loading rate	1.25	kg VS/(m^3·day)
Methane production	1200	m^3/day
Biogas energy content	497	kW
Digester heat demand	166	kW
Cogeneration Plant		
Steam mass flow	0.147	kg/s
Extraction fraction (y)	0.522	–
Net electrical output	104	kW
Process heat delivered	166	kW
Condenser heat rejected	148	kW
Electrical efficiency	20.9	%
CHP efficiency	54.2	%
Grid Impact		
WWTP electricity demand	250	kW
Grid offset	41.6	%

The thermodynamic state points for the Rankine cycle are presented in Table 2.

Table 2: Thermodynamic state points for the baseline Rankine cycle.

State	**Location**	P **(kPa)**	T (°C)	h **(kJ/kg)**	s **(kJ/kg·K)**	x
1	Condenser exit	10	45.8	192	0.649	0.000
2	Pump I exit	500	45.9	192	0.650	–
3	Process heater exit	500	151.8	640	1.860	0.000
4	Mixing chamber exit	500	101.5	426	1.324	–
5	Pump II exit	6000	102.3	433	1.328	–
6	Boiler exit	6000	450.0	3303	6.722	–
7	Turbine extraction	500	172.4	2796	6.930	–
8	Turbine exhaust	10	45.8	2285	7.212	0.875

At state 8 (turbine exhaust), the steam quality of 0.875 indicates wet steam at the condenser inlet, which is within acceptable limits for steam turbine operation. The relatively high extraction fraction ($y = 0.522$) reflects the substantial thermal demand of heating incoming sludge from 15 °C to 35 °C.

3.2 Parametric Analysis

3.2.1 Reactor Volume

Figure 2 shows how net electrical output and CHP efficiency vary with reactor volume at constant HRT (20 days). The relationship is approximately linear because methane production scales directly with volume, while the extraction fraction decreases slightly at larger scales due to sub-linear growth in wall heat losses. The WWTP demand of 250 kW is met at a reactor volume of approximately 7000 m^3.

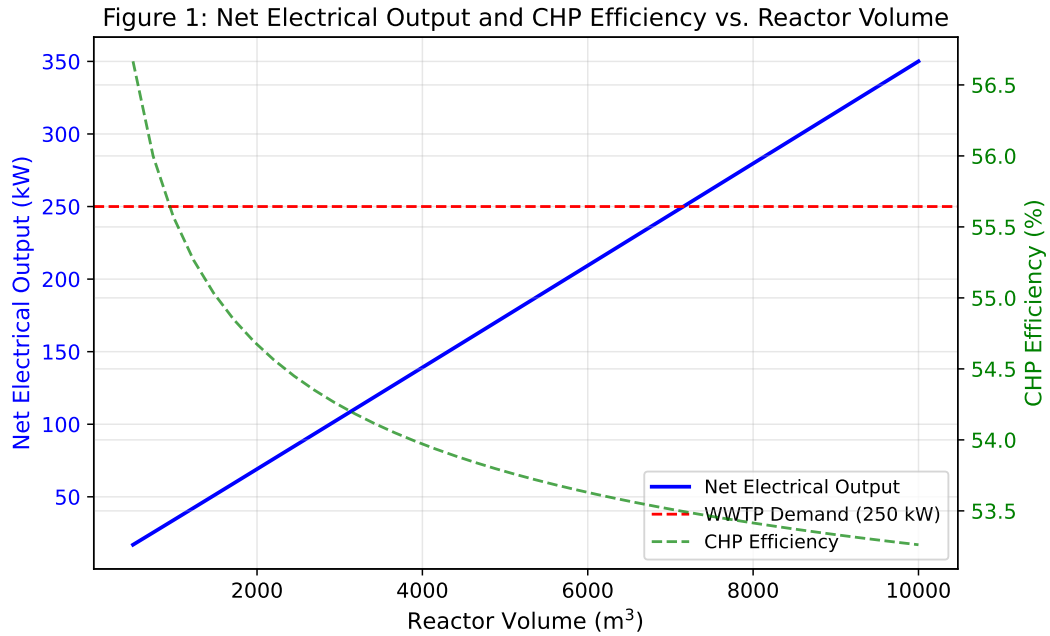

Figure 2: Net electrical output and CHP efficiency as a function of reactor volume. The dashed red line indicates the WWTP electricity demand (250 kW) for a plant serving 100,000 people.

3.2.2 Boiler Pressure

Figure 3 presents the effect of boiler pressure on CHP performance at fixed digester conditions. Both net electrical output and electrical efficiency increase with boiler pressure, as higher pressure ratios across the turbine produce more work per unit mass of steam. However, the gains exhibit diminishing returns above approximately 8 MPa, consistent with fundamental Rankine cycle behavior.

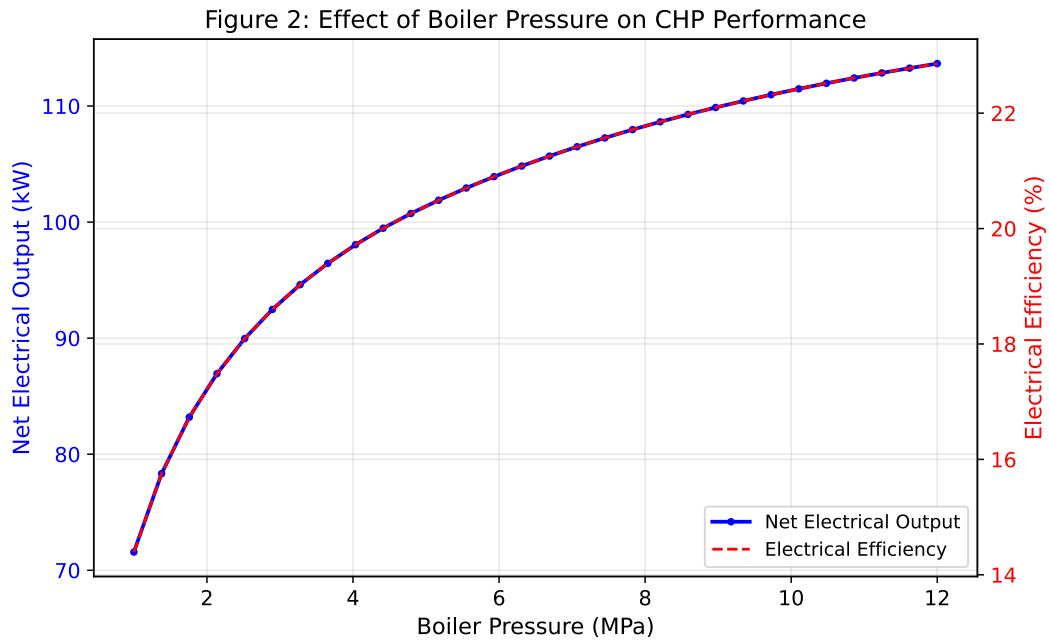

Figure 3: Effect of boiler pressure on net electrical output and electrical efficiency.

3.2.3 Extraction Pressure

Figure 4 illustrates the trade-off inherent in extraction pressure selection. At lower extraction pressures, more work is extracted in the high-pressure turbine stage before the bleed point, and the extraction steam carries more enthalpy, so a smaller fraction y suffices to meet the digester heat demand. This results in higher electrical output at lower extraction pressures but a modest decrease in overall CHP efficiency, as more energy is rejected in the condenser.

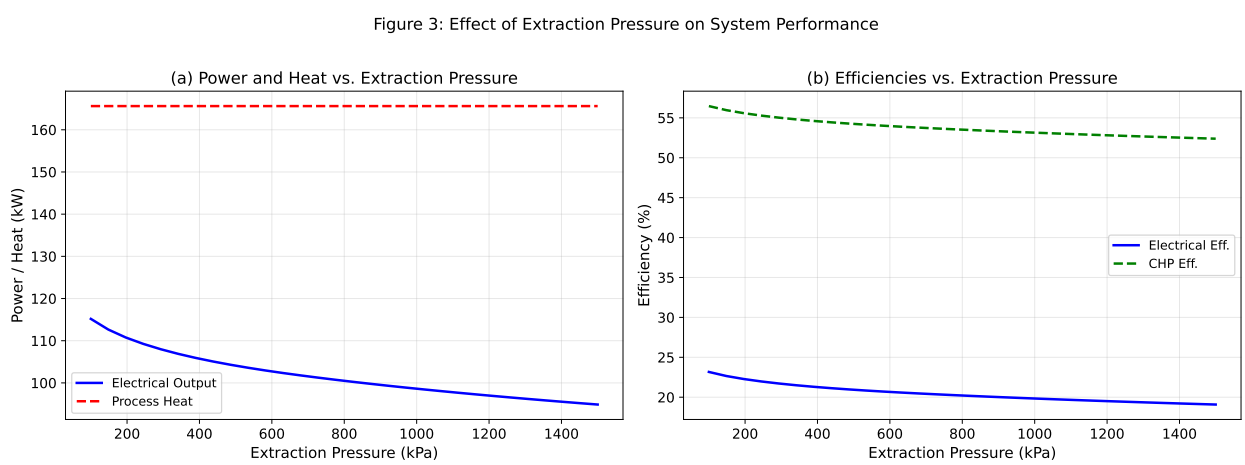

Figure 4: Effect of extraction pressure on (a) power and heat output, and (b) system efficiencies.

3.3 Energy Balance

Figure 5 presents the energy flow through the system at baseline conditions. Of the 497 kW of biogas thermal energy, 423 kW is transferred to the steam cycle (85% boiler efficiency), producing 104 kW of electrical output and 166 kW of useful process heat. The condenser rejects 148 kW, and minor losses account for the remainder.

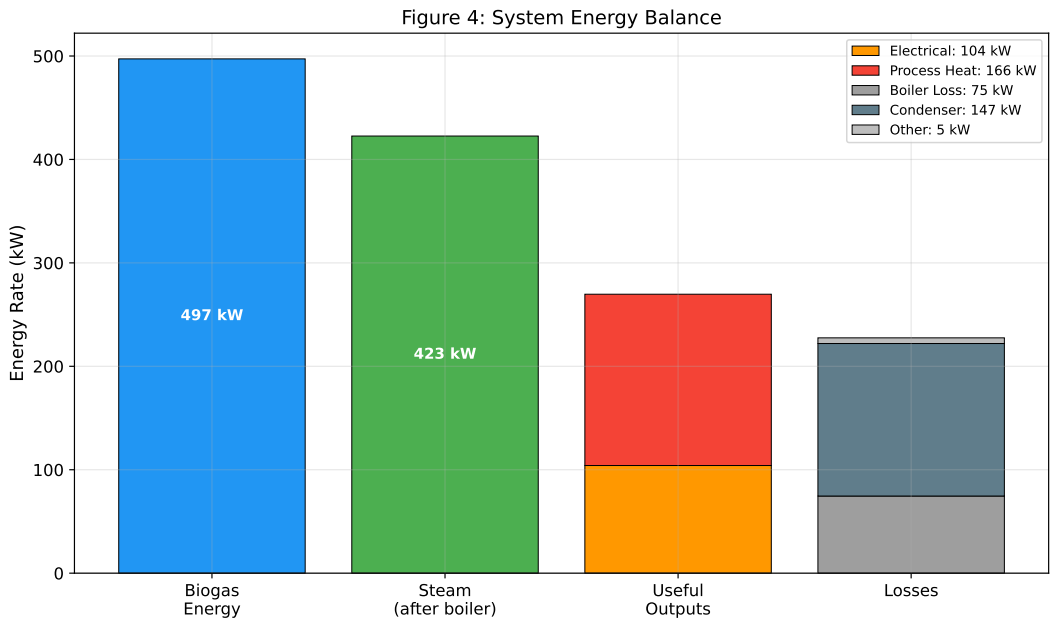

Figure 5: Energy balance for the baseline system, showing the flow from biogas input to useful outputs and losses.

3.4 Grid Comparison

Figure 6 compares the CHP-integrated plant to grid-only operation on an annual basis. The CHP system reduces grid electricity purchases from 2190 MWh/ to 1278 MWh/, saving approximately $91,000 per year and avoiding 365 tonnes of CO_2 emissions annually.

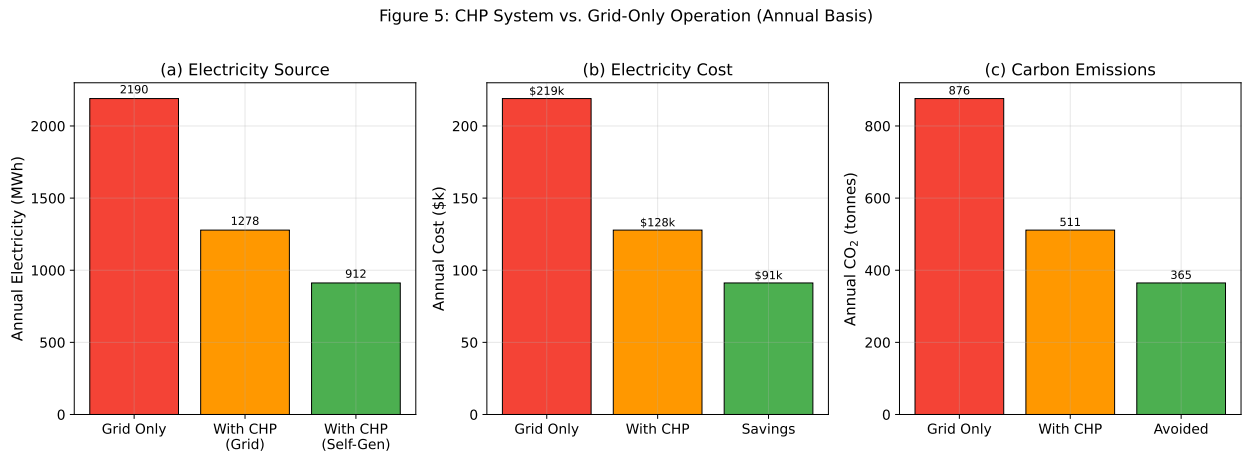

Figure 6: Annual comparison of CHP-integrated vs. grid-only operation: (a) electricity source, (b) cost, (c) CO_2 emissions.

3.5 Optimization Results

Table 3 summarizes the three optimization runs.

Table 3: Optimization results for three objective functions.

	Self-Sufficiency	**Max Power**	**Max CHP Eff.**
Reactor volume (m^3)	7157	3000 (fixed)	3000 (fixed)
P_{boiler} (MPa)	6.0 (fixed)	12.0	12.0
$T_{\text{superheat}}$ (°C)	450 (fixed)	550	550
P_{extract} (kPa)	500 (fixed)	200	200
$\dot{W}_{\text{net}}$ (kW)	250.0	125.1	125.1
η_{elec} (%)	20.9	25.2	25.2
η_{CHP} (%)	54.2	58.5	58.5

The self-sufficiency optimization finds that a reactor volume of 7157 m^3 (with proportional feed rate at 20-day HRT) produces exactly enough electrical power to meet the 250 kW WWTP demand. The maximum-power and maximum-efficiency optimizations converge to the same operating point—higher boiler pressure (12 MPa), higher superheat (550 °C), and lower extraction pressure (200 kPa)—yielding a 20% improvement in electrical output over baseline.

3.6 Breakeven Analysis

Figure 7 shows the required reactor volume for electrical self-sufficiency as a function of population served. The relationship is approximately linear: each additional 10,000 people

requires roughly 700 m^3 of additional reactor volume. A plant serving 50,000 people requires approximately 3500 m^3, while one serving 250,000 people requires approximately 18 000 m^3.

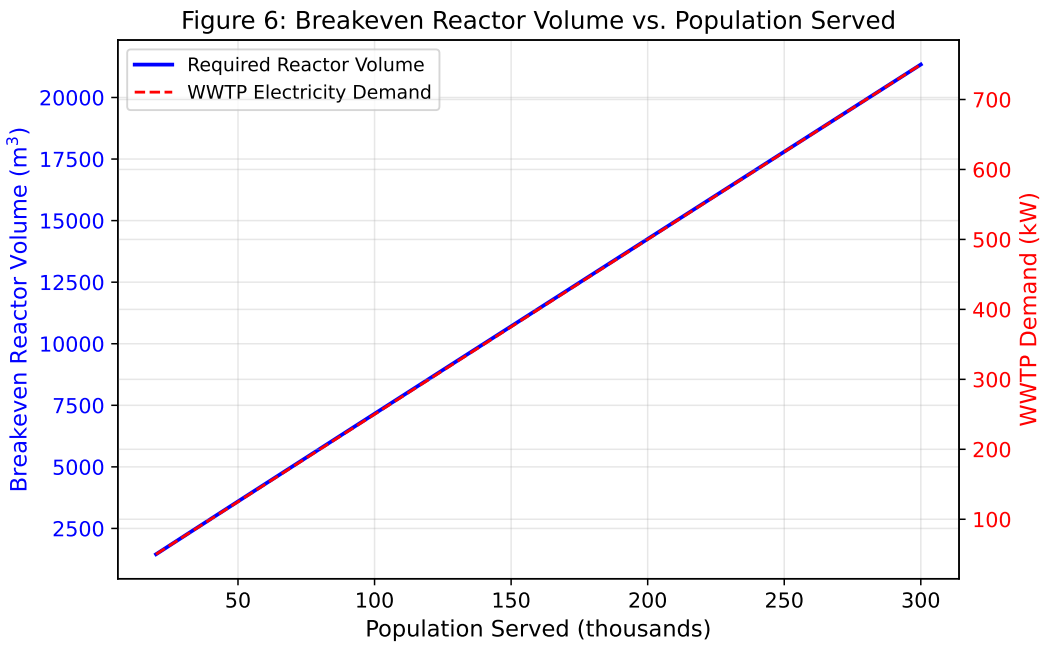

Figure 7: Breakeven reactor volume (for electrical self-sufficiency) as a function of population served.

3.7 Efficiency Across Scales

Table 4 presents system performance at four reactor scales. Electrical efficiency is nearly constant (20.7–21.1%), while CHP efficiency decreases slightly at larger scales because wall heat losses grow sub-linearly with volume, reducing the extraction fraction.

Table 4: System performance at various reactor scales (constant HRT = 20 days).

Scale	V **(m³)**	**CH_4 (m³/d)**	$\dot{W}_{\mathbf{elec}}$ **(kW)**	$\dot{Q}_{\mathbf{proc}}$ **(kW)**	$\eta_{\mathbf{elec}}$ **(%)**	$\eta_{\mathbf{CHP}}$ **(%)**
Small	1000	400	34	58	20.7	55.6
Medium	3000	1200	104	166	20.9	54.2
Large	6000	2400	209	324	21.1	53.6
Very Large	10000	4000	350	533	21.1	53.3

4 Discussion

4.1 Thermodynamic Trade-offs

The central trade-off in this CHP system is between electrical output and process heat delivery, mediated by the extraction fraction y. At baseline, over half of the steam (52.2%) is extracted for digester heating, significantly reducing turbine power output. This is driven primarily by the sludge heating load (148 kW of the total 166 kW demand), which is proportional to the temperature difference between feed and operating conditions.

Several strategies could reduce this thermal penalty:

- *Sludge preheating* using waste heat from the condenser or digestate
- *Heat recovery* from the hot digestate stream via a counter-current heat exchanger
- *Improved insulation* to reduce wall losses (though these are already modest at 18 kW)

Implementing a sludge-digestate heat exchanger could recover approximately 50% of the sludge heating load, reducing y from 0.52 to roughly 0.30 and increasing electrical output by an estimated 25–30%.

4.2 Boiler Pressure and Superheat

The optimization results indicate that operating at higher boiler pressure (12 MPa) and superheat temperature (550 °C) improves both electrical output and CHP efficiency. This is expected from Rankine cycle theory: higher mean temperature of heat addition improves Carnot-limited efficiency. However, these conditions require more expensive metallurgy and increase equipment cost. For a biogas-fired system of this scale, the baseline conditions (6 MPa, 450 °C) represent a practical compromise between thermodynamic performance and capital cost.

4.3 Self-Sufficiency Feasibility

The self-sufficiency analysis reveals that a reactor volume roughly 2.4 times the baseline (7157 m^3 vs. 3000 m^3) is needed for electrical independence. This corresponds to a treatment plant serving approximately 240,000 people—a large but not unusual municipal system. Smaller plants can still benefit significantly from partial grid offset: even the baseline configuration reduces grid purchases by 42%.

4.4 Economic Viability

The estimated simple payback of 2.9 years is attractive by infrastructure investment standards, where paybacks under 5 years are generally considered favorable. This estimate is conservative in that it does not account for:

- Revenue from renewable energy credits or carbon credits
- Avoided sludge disposal costs (the digestate has value as fertilizer)
- Escalation of grid electricity prices over the 20+ year equipment lifetime
- Potential revenue from excess electricity sold back to the grid (at self-sufficient scale)

4.5 Limitations and Assumptions

Several simplifying assumptions should be noted:

1. **Steady-state model**: Real digesters exhibit transient behavior during startup and in response to feed variability. A time-resolved model would capture these dynamics but is beyond the scope of this analysis.
2. **Fixed methane yield**: The VMP of $0.4\,\mathrm{m^3\,m^{-3}\,d^{-1}}$ is treated as constant. In practice, yield depends on sludge composition, OLR, and microbial community health.
3. **Ideal mixing**: The CSTR assumption implies perfect mixing, which may overestimate performance relative to real reactors with dead zones.
4. **No parasitic loads**: Digester mixing energy, pumping, and other auxiliary loads are not subtracted from the net electrical output.
5. **Simple economic model**: The payback calculation uses constant energy prices and does not include maintenance costs, financing, or time value of money.

4.6 Comparison to Literature

The biogas energy yield of 0.7 to $2.0\,\mathrm{kW\,h\,m^{-3}}$ of biogas reported by Cheng and Wang (2013), as cited in **(author?)** [1], corresponds to our computed value of approximately $6.0\,\mathrm{kW\,h\,m^{-3}}$ of methane (or $3.6\,\mathrm{kW\,h\,m^{-3}}$ of biogas at 60% CH_4), which falls within the upper range. Our CHP electrical efficiency of 20.9% is consistent with typical small-scale steam Rankine systems, which generally achieve 15–30% electrical efficiency depending on scale and operating conditions.

5 Conclusion

This analysis demonstrates that integrating anaerobic digestion with steam Rankine cogeneration is a thermodynamically sound and economically viable strategy for energy recovery at municipal wastewater treatment plants. The key conclusions are:

1. At baseline conditions (3,000 m^3 reactor, 100,000 population), the CHP system produces 104 kW of net electrical output at 20.9% electrical efficiency and 54.2% overall CHP efficiency, offsetting 42% of the plant's grid electricity demand.
2. Full electrical self-sufficiency requires a reactor volume of approximately 7.157 m^3—achievable for plants serving 200,000+ people.
3. The system achieves a simple payback period of 2.9 years and avoids 365 tonnes of CO_2 emissions annually at the baseline scale.
4. Optimizing CHP parameters (higher boiler pressure and superheat, lower extraction pressure) can improve electrical output by approximately 20%, though at higher capital cost.

Recommendation: For municipal treatment plants serving populations above 50,000, CHP integration with anaerobic digestion is recommended as a cost-effective upgrade that improves energy independence, reduces operating costs, and lowers carbon emissions. Plants should prioritize sludge-digestate heat recovery to minimize the extraction fraction and maximize electrical output. For smaller plants, the economic case depends on local electricity prices and available incentives.

AI Use Documentation

This project was completed with the assistance of Claude (Anthropic, Claude Opus 4.6 model), used as an AI coding and analysis assistant through the Claude Code CLI tool.

How AI was used:

- **Code generation**: Claude generated the Python simulation code (digester model, CHP Rankine cycle model, driver script) based on detailed specifications and thermodynamic equations discussed collaboratively.
- **Unit testing**: Claude wrote 59 unit tests covering the digester model, CHP thermodynamic calculations, energy balance closure, and system integration.

- **Report writing**: Claude drafted this LaTeX report based on the simulation results, with the student providing direction on structure, emphasis, and technical content.
- **Literature integration**: Claude incorporated data and equations from the provided research papers into the models and report.

What the student contributed:

- Project selection and scope definition
- Selection of baseline parameters (methane production rate, VFA concentration) from literature
- System architecture decisions (steam Rankine CHP, CSTR digester type)
- Review and validation of simulation results
- Direction on optimization objectives and analysis priorities

References

[1] G. Náthia-Neves, M. Berni, G. Dragone, S. I. Mussatto, and T. Forster-Carneiro, "Anaerobic digestion process: technological aspects and recent developments," *Int. J. Environ. Sci. Technol.*, vol. 15, pp. 2033–2046, 2018. doi:10.1007/s13762-018-1682-2.

[2] I. H. Bell, J. Wronski, S. Quoilin, and V. Lemort, "Pure and pseudo-pure fluid thermophysical property evaluation and the open-source thermophysical property library CoolProp," *Ind. Eng. Chem. Res.*, vol. 53, no. 6, pp. 2498–2508, 2014.

[3] Y. A. Çengel and M. A. Boles, *Thermodynamics: An Engineering Approach*, 8th ed. McGraw-Hill, 2015.

[4] R. Kothari, A. K. Pandey, S. Kumar, V. V. Tyagi, and S. K. Tyagi, "Different aspects of dry anaerobic digestion for bio-energy: An overview," *Renew. Sustain. Energy Rev.*, vol. 39, pp. 174–195, 2014.

[5] L. Appels, J. Baeyens, J. Degrève, and R. Dewil, "Principles and potential of the anaerobic digestion of waste-activated sludge," *Prog. Energy Combust. Sci.*, vol. 34, pp. 755–781, 2008.